


AX 100 - Positioning stop - Type PS

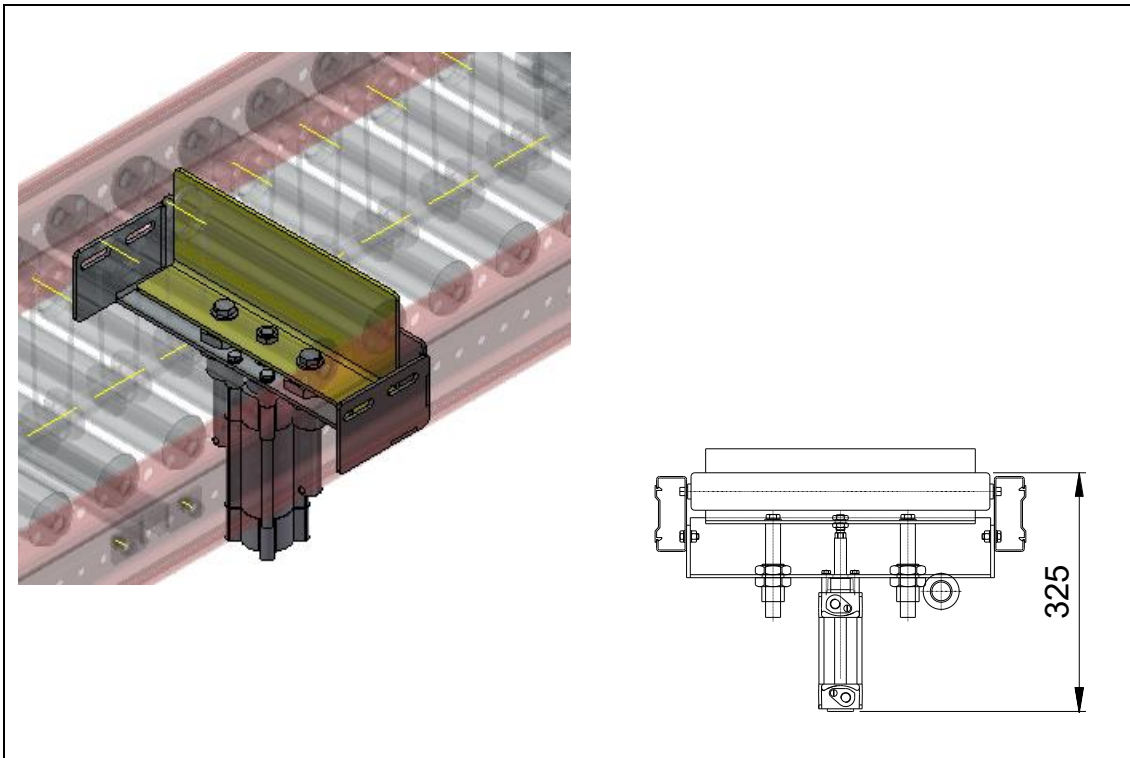

Area of application:

Stop for positioning of transport goods, for example at angle conveyor, pusher or by a workplace.

Technical data:

Function:	Stop plate with plain bearings.
Travel:	50mm (32mm over roller in upper position)
Air consumption:	0.8 NL/cycle.
Cylinder:	VDMA-normed.
Load:	Max 300N against the stop song.