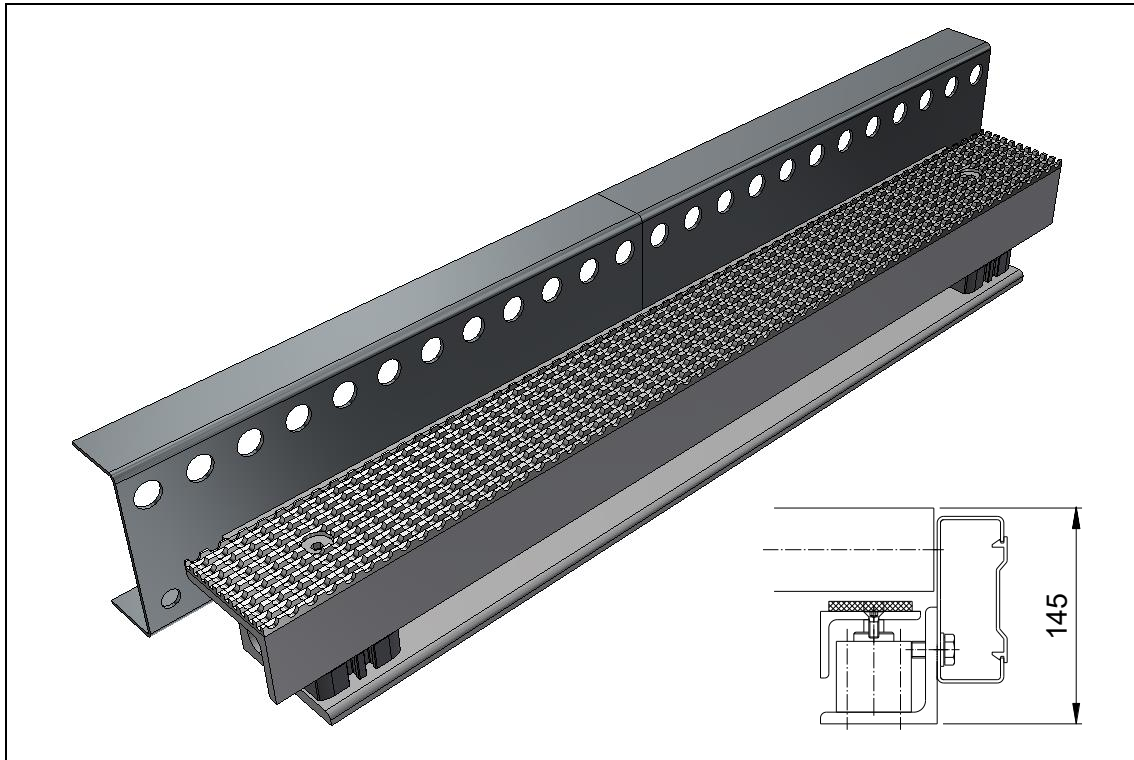


AX 100 – Roller brake – Type RB

**Area of application:**

braking of a section of rollers in a driven, accumulating or undriven roller conveyor;

Technical data:

Profile:	Height-adjustable L-profile, equipped with griptop coating.
Air consumption:	0.01 NL / cycle / cylinder.
Cylinders:	2 pcs. Festo compact cylinder
Length:	300-900 mm.