


AX100 – Angle Connection – Type VA

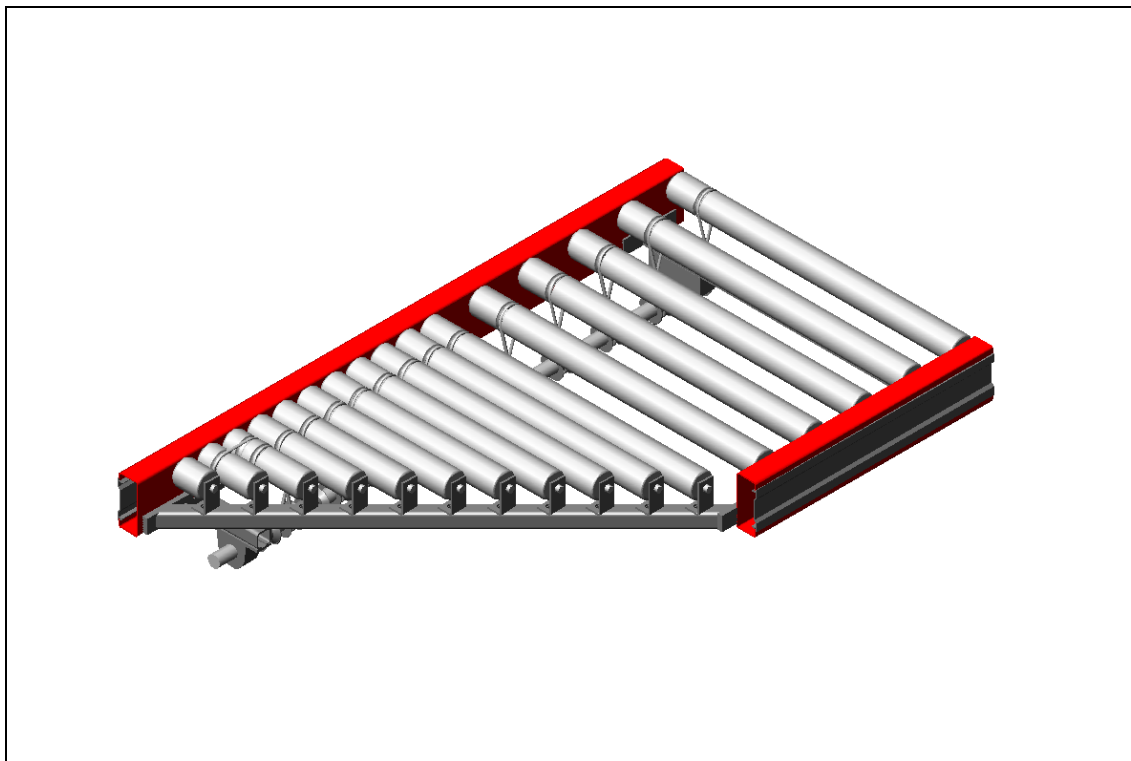

Area of application:

For transport to a main roller conveyor when the speed is high and the direction of the goods towards the conveyor shall be maintained.

Technical data:

Framework:	C-profile steel 15x40x100x40x15x2 mm and square pipe.
Roller splits:	52 and 104mm.
Roller type:	Ø50x1.5 mm, bulleted.
Drive:	Takes place from the connecting conveyor via a shaft coupling.
Transport speeds:	See data sheet for drive unit AX100 type DR.
Other:	The roller conveyor is equipped as standard with drive pulleys for accumulative operation. In addition, the runway can be equipped with drive pulleys that can also handle fixed operation.