


PA 1500 – Drive unit, side-mounted – Type DS

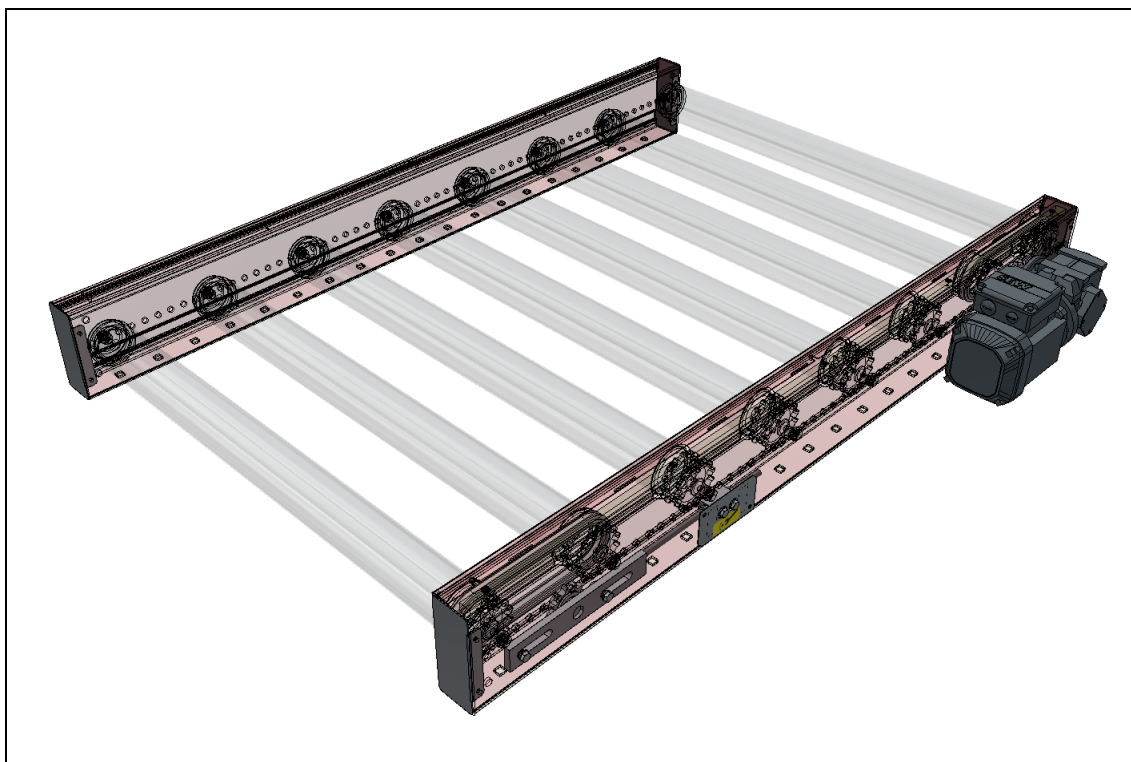

Area of application:

For driving fixed driven roller conveyor PA 1500 type FD and driven accumulative roller conveyor PA 1500 type DA

Technical data :

Gear type:	Worm gear motor.
Chain transmission:	5/8".
Engine effects:	0.37 and 0.55 kW.
Input voltage:	230/400 V _{AC} , 50 Hz.
Protection class:	IP55
Transport speeds:	6, 8, 10, 12, 14 and 16 m/min
Conveyor length:	Maximum 10,800 mm per drive.
Transport height:	Min 145 mm. Contact MH Modules at transport height lower than 450 mm.