


PA 1500 – Drive unit, underlying, frame-mounted - Type DUS

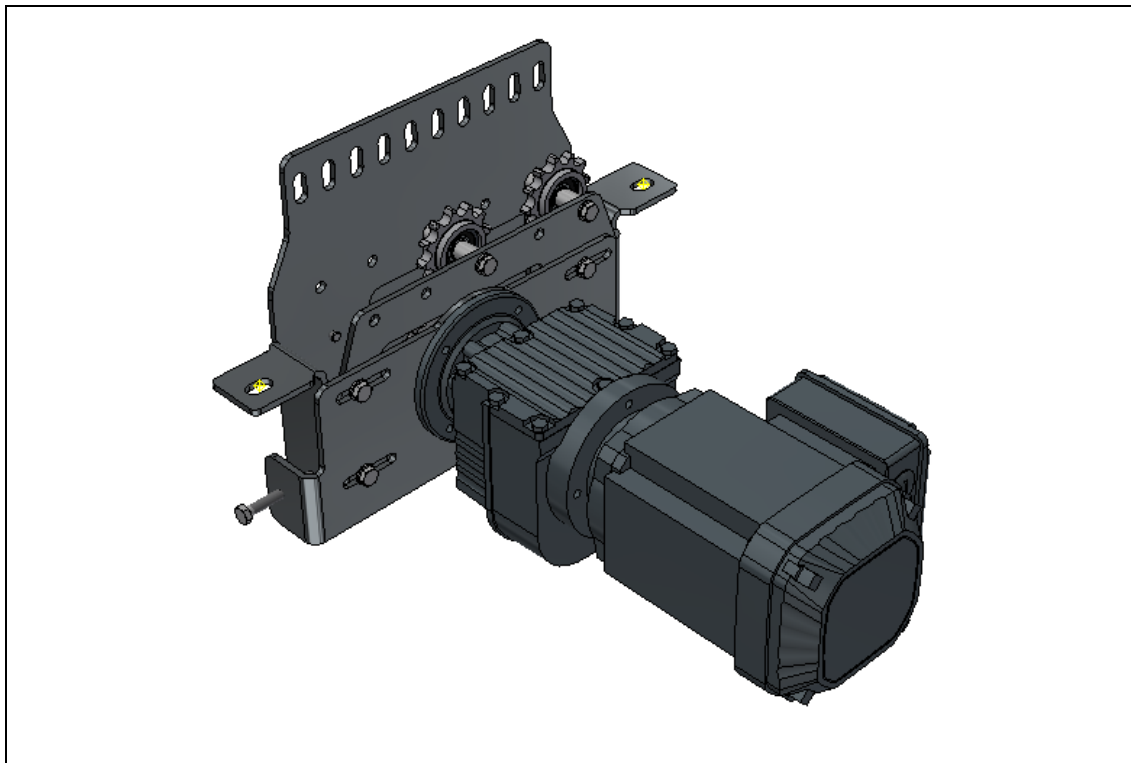

Area of application:

For driving a fixed driven roller conveyor – PA 1500 type FD – and driven accumulative roller conveyor – PA 1500 type DA.

Technical data:

Gear type	Gear motor. NB! Not self-inhibiting!
Chain transmission:	5/8"
Motor effects	0.25, 0.37, 0.55 and 0.75 kW.
Input voltage:	230/400 V _{AC} , 50 Hz.
Protection class:	IP55.
Transportation speeds:	6, 8, 10, 12, 14 and 16 m/min
Conveyor length	Max 10 800 mm per drive unit.
Transportation height:	Minimum 350 mm. Contact MH Modules for control at lower transport heights