


PA 1500 – Chain Conveyor – Type KT

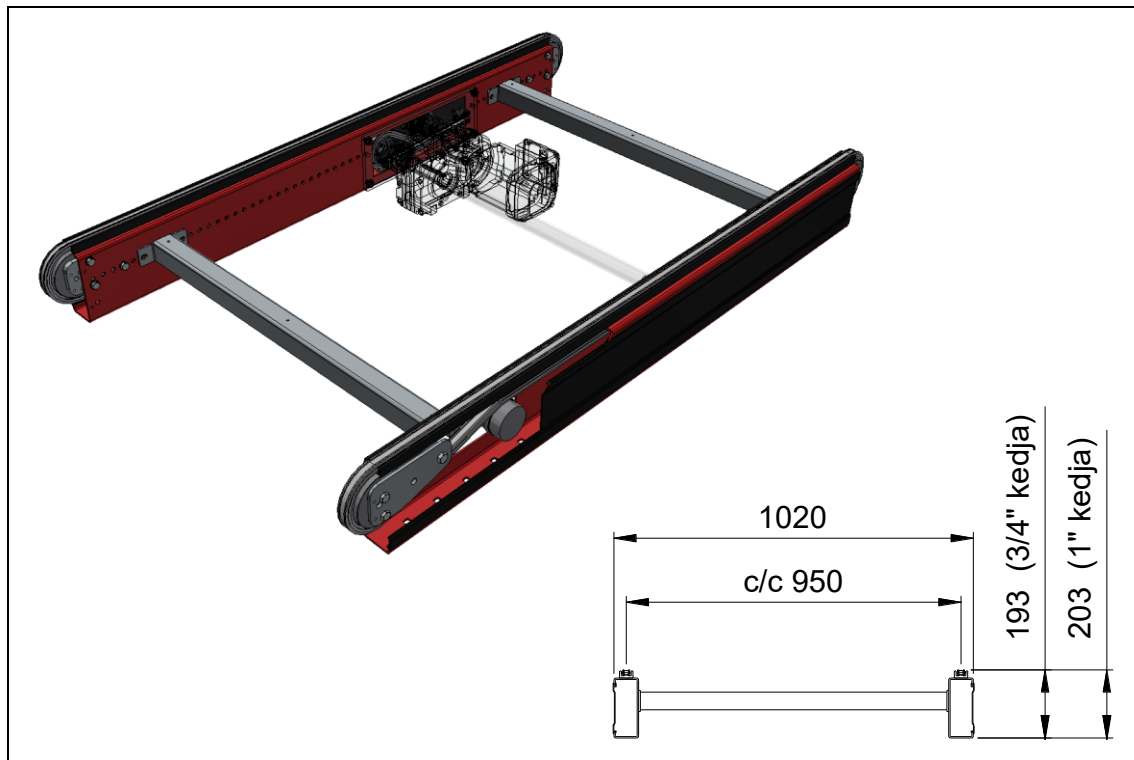

Field of application:

For transverse transport of pallets and transport of goods that is not suitable for transport on roller conveyor.

Technical data:

Loading:	Max 1250 kg/m. Total load on conveyor is max 4000 kg with ¾"-chain and max 6000 kg with 1"-chain.
Frame:	C-profile steel 18x70x170x70x18x4 mm.
Section length:	1350, 1500, 2400 and 2700 mm.
Total length:	Max 10 800 mm per drive unit.
Chain size:	¾" and 1" chain with linear sides on links.
Drive unit:	PA 1500 type DM and DMS
Speed:	See technical specification for respective drive unit.
Supports:	PA 1500 type BS. At goods weights up to 800 kg/m can the distance between the supports be 2,7 m. For weights over 800 kg/m, contact MH Modules .