


PA1500 – Chain conveyor, 3 chains – Type KT3

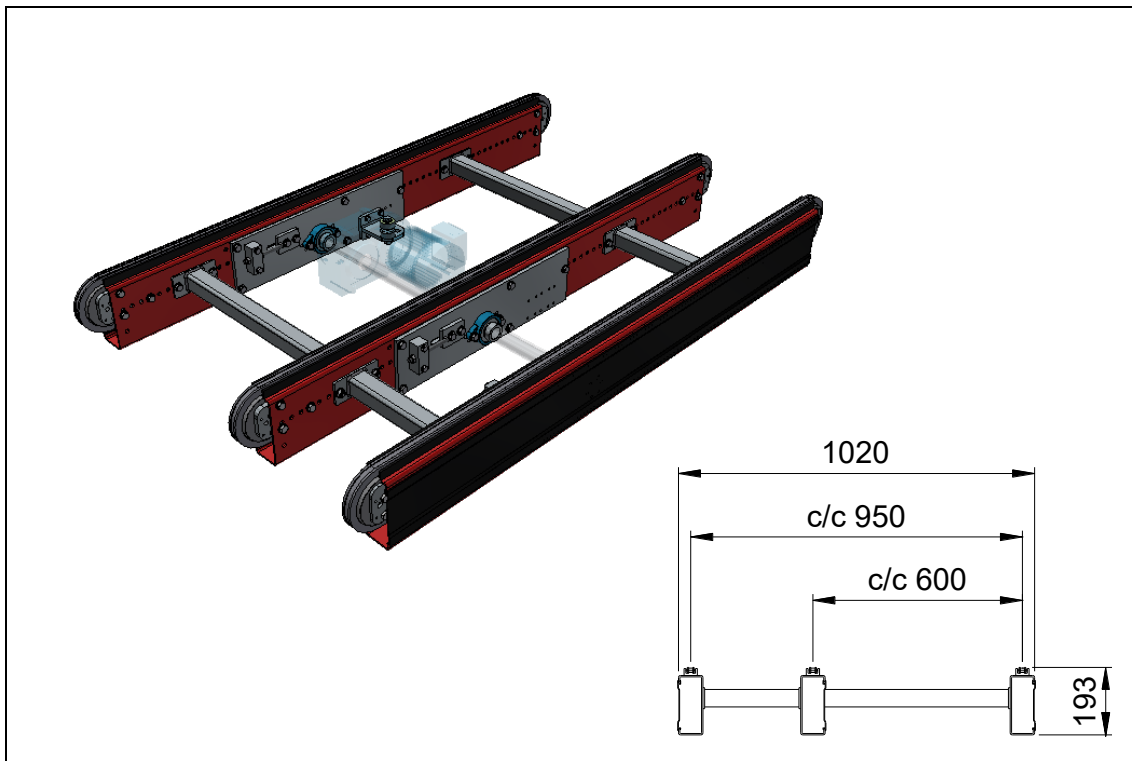

Area of application:

For transverse transport of full and half pallets and the transport of disposable pallets and goods unsuitable for carriage on a roller conveyor;

Technical data:

Load:	Max 1250 kg/m. Total load on the conveyor may be a maximum of 6000 kg with 3/4" chain.
Framework:	C-profile steel 18x70x170x70x18x4 mm.
Section lengths:	1350, 1500, 2400 and 2700 mm.
Conveyor length:	Maximum 10,800 mm per drive station.
Conveyor chains:	3/4" roller chain with straight side washers.
Drive:	PA 1500 type DM and DMS
Transport speeds:	See drive datasheet.
Leg support:	PA1500 type BS adapted to 3-string chain conveyor. For goods weights up to 800 kg/m, the distance between the leg supports can be 2.7 m. For weights over 800 kg/m contact MHModules