


PA 1500 – Empty pallet stop – Type PAPST

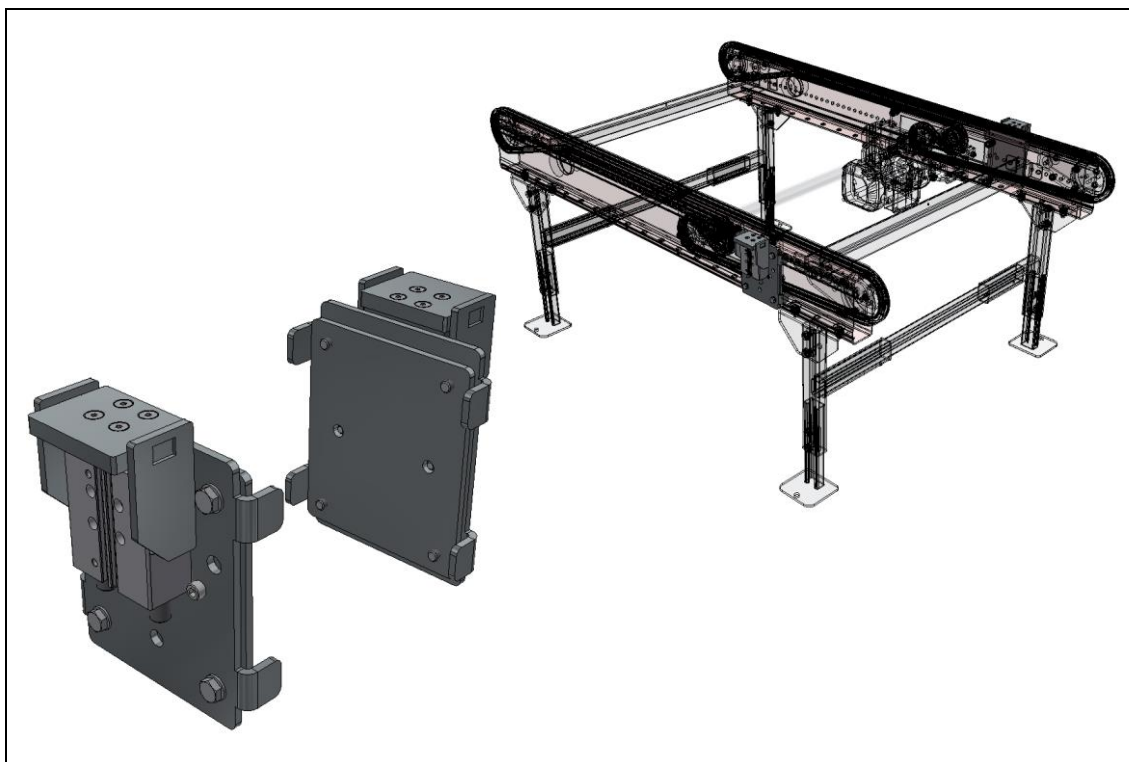

Field of application:

Positioning of empty pallets along a chain conveyor, at for example a robot position or similar.

Technical data:

Cylinder:	Pneumatic linear unit – VDMA-norming.
Stroke:	40 mm.
Mounting:	Outside frame, attached with locking plate in flanges of the frame.
Air consumption:	Approx. 0,2 NI/cycle (One cylinder pair)
Limitations:	Max 25 kg goods weight per cylinder at 9m/min – Total 50 kg good weight for one cylinder pair