


PA 1500 – Slave driven loading station – Type STK

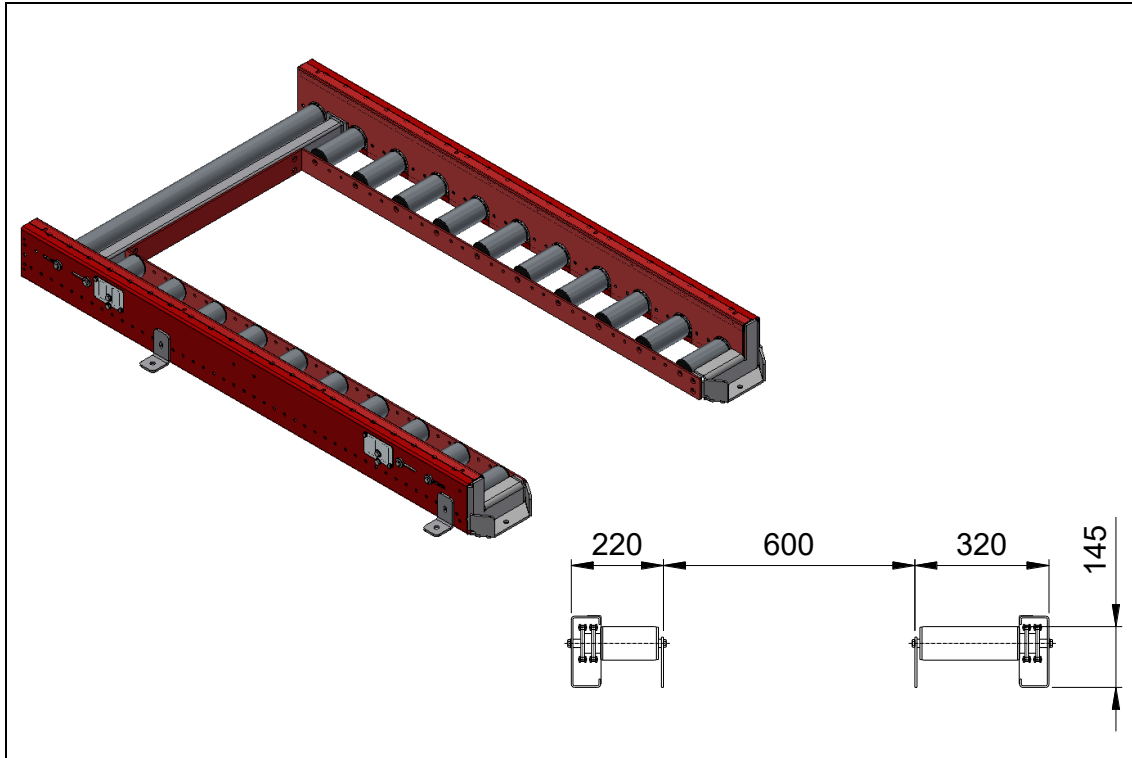

Area of application:

For drop-off and retrieving of goods with fork lift.

Technical data:

Conveyor type:	Fixed driven/driven accumulative, slave-driven by the conveyor beforehand.
Framework:	C-profile steel 18x70x170x70x18x4.
Section lengths:	1500 mm.
Roller lengths:	900 and 1100 mm
Roller splits:	150 and 200 mm
Roller type:	Ø80x2 mm
Transport speeds:	See drive data sheet
Leg support:	Angles of attachment.
Other:	When manual fork lift is used in the connecting handling, ramp is required.